



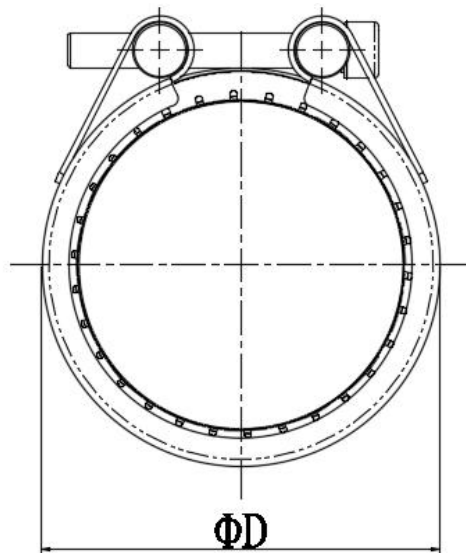

Beijing Grip Pipe Tech Co., Ltd.

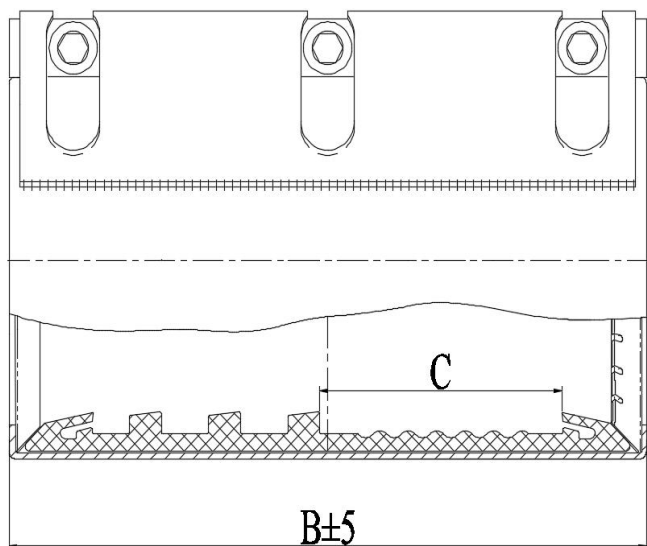

GRIP-G/M

Pipe O.D	Clamping Range	PN	Product Φ D	Width B	Distance between sealing slips	Setting gap between pipe ends	Torque rate	Bolt
(mm)	(mm)	(bar)	(mm)	(mm)	(mm)	Max (mm)	(Nm)	M
48.3	47-49	18	68	140	54	20	10	M8*60
60.3	59-61	18	80	140	54	20	10	
76.1	75-77	18	98	140	54	20	20	M8*80
88.9	87-91	18	111	200	76	25	20	
114.3	113-116	16	137	200	76	25	30	
139.7	138-142	16	164	200	76	25	40	M8*80
168.3	167-170	16	192	200	76	25	40	
219.1	216-222	10	250	250	85	30	80	M12*120
273	270-276	10	303	250	85	30	80	
325	322-328	10	356	250	85	30	80	
377	374-380	10	408	250	85	30	80	