
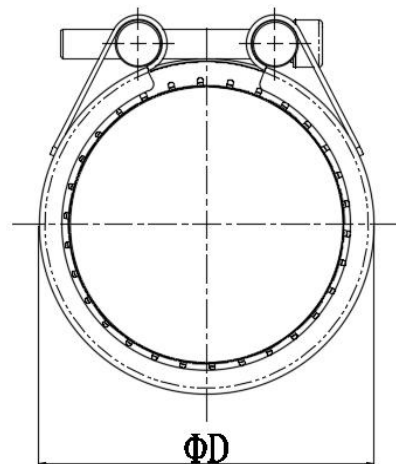


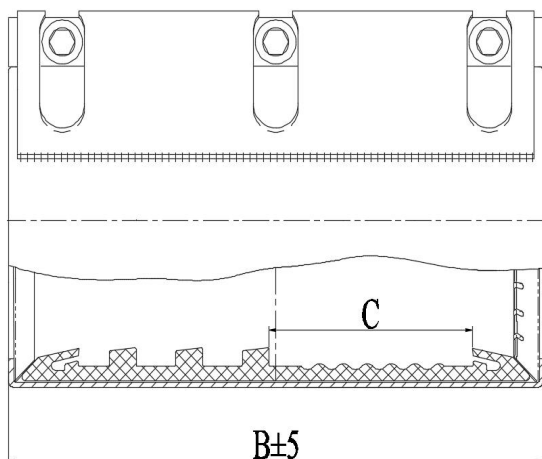

GRIP-G/M

管道外径	适用范围	工作压力	产品外径 ΦD	产品宽度 B	密封间距 C	管段间距	扭力值 PN	螺栓	允许 偏转角 θ	允许 伸缩量
(mm)	(mm)	(bar)	(mm)	(mm)	(mm)	Max (mm)	(Nm)	M	Max	Max (mm)
48.3	47-49	18	68	140	54	20	10	M8*60	5°	60
60.3	59-61	18	80	140	54	20	10		5°	60
76.1	75-77	18	98	140	54	20	20	M8*80	5°	60
88.9	87-91	18	111	200	76	25	20		5°	90
114.3	113-116	16	137	200	76	25	30		5°	90
139.7	138-142	16	164	200	76	25	40	M8*80	5°	90
168.3	167-170	16	192	200	76	25	40		5°	90
219.1	216-222	10	250	250	85	30	80	M12*120	5°	100
273	270-276	10	303	250	85	30	80		5°	100
325	322-328	10	356	250	85	30	80		5°	100
377	374-380	10	408	250	85	30	80		5°	100